


472710



DIMENSIONS DRAWING

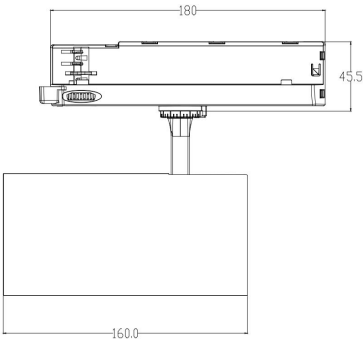

FINISH

472710 BLACK

472711 WHITE


DESCRIPTION

- 3-circuit 25/30/35W 3/3.5/4K 36° Black Track Fitting
- Switchable Power 25/30/35W
- Switchable CCT 3000K / 3500K / 4000K
- Dimmable Flicker Free
- Anti-glare with 30° cut-off angle
- 360° horizontal rotation and 90° vertical adjustable
- 36° Beam Angle, Interchangeable 15°/24°/36° / 45° Lens Options
- Sleek, compact cylinder housing and no visible screws
- Texture white and texture black finish
- Available in track, track pendant, canopy pendant and surface mounted installations

472711



DIMENSIONS DRAWING

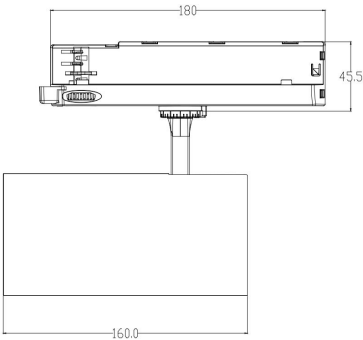

FINISH

472710	BLACK
472711	WHITE

DESCRIPTION

- 3-circuit 25/30/35W 3/3.5/4K 36° White Track Fitting
- Switchable Power 25/30/35W
- Switchable CCT 3000K / 3500K / 4000K
- Dimmable Flicker Free
- Anti-glare with 30° cut-off angle
- 360° horizontal rotation and 90° vertical adjustable
- 36° Beam Angle, Interchangeable 15°/24°/36° / 45° Lens Options
- Sleek, compact cylinder housing and no visible screws
- Texture white and texture black finish
- Available in track, track pendant, canopy pendant and surface mounted installations